




TRAFFICOTE™ #105 SD Self-Leveling Static Dissipative

General Polymers TRAFFICOTE #105 SD provides a high build (minimum 1/16") protective surfacing. By utilizing a high solids, low viscosity binder resin this TRAFFICOTE #105 SD system provides a fluid, self-leveling mixture that is easily spread with a v-notched trowel or v-notched squeegee which results in a smooth attractive finish. TRAFFICOTE #105 SD can be finished with a high gloss urethane or a stipple finish epoxy topcoat.

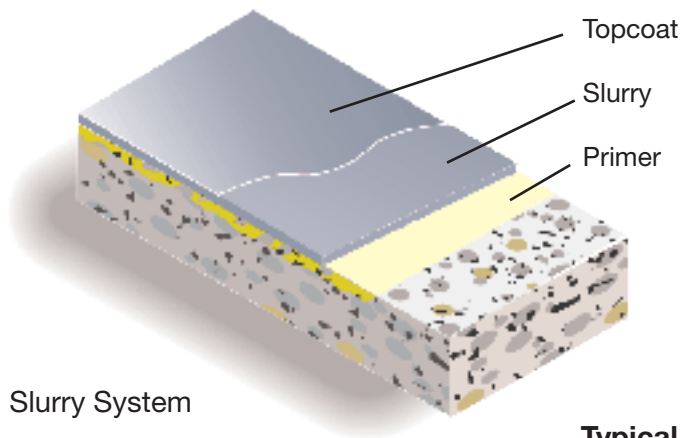

1/16" Slurry System

Advantages

- 10^6 - 10^9 ohms resistance protects sensitive equipment throughout entire system
- Meets NFPA 99 Standards
- Seamless smooth attractive finish
 - Urethane Topcoat
 - Long term gloss retention
 - Good chemical resistant
 - Ultra violet stable
 - Epoxy Topcoat
 - Stipple finish
 - Easy to maintain
 - Chemical resistant

Uses

- Electronics assemble
- Electronics production
- Clean rooms
- Computer rooms
- Quality control labs

Typical Physical Properties

Color	4620E 3525	Standard Colors Light, Medium Gray
Conductivity Resistance ANSI/ESD-S7.1		10^6 - 10^9 ohms
Static Charge Decay MIL-B-81705B		Dissipates a 5,000 volt charge to zero in less than 0.1 seconds
Abrasion Resistance ASTM D 4060		100 mg lost
Compressive Strength ASTM D 695		8,500 psi
Tensile Strength ASTM D 638		2,500 psi
Flexural Strength ASTM D 790		10,000 psi
Hardness, Shore D ASTM D 2240		75/70
Adhesion ACI 503R		300 psi concrete failure
Flammability		Self-extinguishing over concrete
Gloss Meter 60°	4620E 3525	80-100 pts. Stipple gloss

ASTM C = Mortar System
ASTM D = Resin only

Installation

The following information is to be used as a guideline for the installation of the **TRAFFICOTE #105 SD SYSTEM**. Contact the Technical Service Department for assistance prior to application.

Surface Preparation – General

General Polymers systems can be applied to a variety of substrates, if the substrate is properly prepared. Preparation of surfaces other than concrete will depend on the type of substrate, such as wood, concrete block, quarry tile, etc. Should there be any questions regarding a specific substrate or condition, please contact the Technical Service Department prior to starting the project. Refer to Surface Preparation Form (G-1).

Application Information

VOC MIXED		MATERIAL	MIX RATIO	THEORETICAL COVERAGE PER COAT CONCRETE	PACKAGING
<50 g/L	Conductive Primer	3424 1-1.5 pints water per 1.25 gallon kit	4:1	250 sq. ft. / gal	1.25 gals
<50 g/L 0	Slurry	3564	3:1	37.5 sq. ft. / gal	4 or 20 gals
		5305	Static Dissipative Aggregate	9 lbs / 1 gal	18 lbs
<10 g/L	Topcoat	4620E	2:1	300 sq. ft. / gal	3 or 15 gals

Different optional seal coats - Consult individual Technical Data Sheet for mixing and application instructions.

3525 Static Control Epoxy Coating

Conductive Primer

Mixing and Application

1. Premix 3424A (hardener) and 3424B (resin) separately, using a low speed drill and Jiffy blade. Mix for one minute and until uniform, exercising caution not to whip air into the material.

2. Add 4 parts 3424A (hardener) to 1 part 3424B (resin) by volume. Mix with low speed drill and Jiffy blade for three minutes and until uniform. 3424 must be reduced with potable water up to 10-15% minimum. DO NOT reduce product until after both components have been mixed together for 90 seconds. Mix side A and side B minimum of 90 seconds, then MUST ADD 1-1.5 pints water per 1.25 gallon kit". Reduction water must be added after A side and B side is mixed first.

3. Apply using a short nap roller at a rate of 250 - 320 square feet per gallon (5-6 WFT mils). Allow to cure at least 4 hours prior to topcoating but no more than 24 hours. A light sanding may be required prior to applying topcoat.

4. Inspect primer coat prior to application of system. Test surface resistance in accordance with NFPA 99. Resistance range should be less than 150,000 ohms. If deviation from this range occurs, consult the Technical Service Department immediately.

Surface Preparation – Concrete

Concrete surfaces shall be abrasive blasted to remove all surface contaminants and laitance. The prepared concrete shall have a minimum surface profile equal to 40-60 grit sandpaper.

After initial preparation has occurred, inspect the concrete for bug holes, voids, fins and other imperfections. Protrusions shall be ground smooth while voids shall be filled with a General Polymers system filler. For recommendations, consult the Technical Service Department.

Temperature

Throughout the application process, substrate temperature should be 50°F - 90°F. Substrate temperature must be at least 5°F above the dew point. Applications on concrete substrates should occur while temperature is falling to lessen offgassing. The material should not be applied in direct sunlight, if possible.

Slurry Coat

Mixing and Application

1. Premix 3564 A (resin) using a low speed drill and Jiffy blade. Mix for one minute and until uniform, exercising caution not to whip air into the material.
2. Add 3 parts 3564A (3 quarts resin) to 1 part 3564B (1 quart hardener) by volume. Mix with a low speed drill and Jiffy blade for three minutes and until uniform. Slowly add 9 lbs. of 5305 Static Dissipative Aggregate until material is wet out. Apply using a v-notched trowel or notched squeegee and back roll with a looped roller. Allow to self-level (approximately 10-15 minutes). Allow to cure overnight.
3. Inspect base coat prior to application of seal coat. Test surface resistance in accordance with NFPA 99. Average resistance range should be less than 1,000,000,000 ohms. If deviation from this range occurs, consult the Technical Service Department immediately.

Seal Coat (4620E)

Mixing and Application

1. Premix 4620EA (resin) using a low speed drill and Jiffy blade. Mix for one minute and until uniform, exercising caution not to whip air into the material.
2. Add 2 parts 4620EA (resin) to 1 part 4620B (hardener) by volume. Mix with low speed drill and Jiffy blade for three minutes and until uniform. Apply material via airless spray or roller at a spread rate of 300 sq. ft. per gallon to yield 5 mils WFT. Allow material to cure 8-10 hours.

3. Inspect seal coat. Test surface resistance in accordance with NFPA 99. Average resistance range should be 1,000,000 - 1,000,000,000 ohms. If deviation from this range occurs, consult the Technical Service Department immediately. Allow to cure at least 24 hours before opening to light foot traffic.

Different optional seal coats - Consult individual Technical Data Sheet for mixing and application instructions.

3525 Static Control Epoxy Coating

Application Equipment

Brush / Roller

Use 1/4" phenolic core rollers and professional quality, medium stiff natural bristle brushes.

Cleanup

Clean up mixing and application equipment immediately after use. Use toluene or xylene. Observe all fire and health precautions when handling or storing solvents.

Safety

Refer to the MSDS sheet before use. All applicable federal, state, local and particular plant safety guidelines must be followed during the handling and installation and cure of these materials.

Safe and proper disposal of excess materials shall be done in accordance with applicable federal, state, and local codes.

Material Storage

Store materials in a temperature controlled environment (50°F - 90°F) and out of direct sunlight.

Keep resins, hardeners, and solvents separated from each other and away from sources of ignition. One year shelf life is expected for products stored between 50°F - 90°F.

Maintenance

Occasional inspection of the installed material and spot repair can prolong system life. For specific information, contact the Technical Service Department.

Shipping

- Destinations East of the Rocky Mountains are shipped F.O.B. Cincinnati, Ohio.
- Destinations West of the Rocky Mountains are shipped F.O.B. Victorville, California.

For specific information relating to international shipments, contact your local sales representative.

Static Control Floors

Static control flooring can be defined as a flooring system that can drain and/or dissipate static charges by grounding personnel, equipment or other objects contacting the floor surface or that controls the generation and accumulation of static charges. The resistance to the movement of electrons across the material's surfaces defines static control floorings into the following two categories:

- i) Conductive Floor has a resistance of $2.5 \times 10^4 - 10^6$ ohms per 3 ft. It can drain static charge dissipating a 5,000 - volt charge to zero in 0.05 seconds.
- ii) Static Dissipative Floor has a resistance of $10^6 - 10^9$ ohms per 3 ft. It adds no static electricity to the environment and drains off a 5,000 - volt charge to zero in less than 0.2 seconds.

A conductive floor has a much lower electrical resistance than a dissipative floor. It will carry the static charges to a ground quickly and efficiently as to prevent accidental discharge and ignition. If the floor is too conductive, an operator on

the floor can become too effectively grounded and will suffer electrical shock. For this reason the NFPA requires all flooring surfaces to have a minimum resistance of 25,000 ohms. Frequent contact between tools and equipment, or dropping the tools on the floor, will cause spark and ignition. For those circumstances, a sparkproof conductive flooring system is highly recommended. The rapid rate of charge dissipation of conductive flooring can create a magnetic field which can present a problem for manufacturers of electronic components.

Dissipative flooring systems have greater resistance to electric current flow than conductive floorings. At a working environment dealing with high test voltages, such as facilities where electronic components are manufactured or assembled, a dissipative floor should be installed so that the static charges can be gradually transferred to ground, protecting personnel from electrical shock while at the same time protecting sensitive electronic equipment.

Conductive Flooring Measurement Guide

There are three test standards available for the evaluation of static dissipative or conductive floors and they are ANSI/ESD-S7.1, ASTM F 150 and NFPA 99 (56A). These test methods describe three types of measurements to be taken, which are summarized below:

- (1) Surface -to-surface resistance — Two 2.5 inch diameter electrodes, each weighing 5 lbs, are placed 3 ft apart on the floor. Apply the prescribed voltage (either 500VDC for conductive flooring or 100VDC for static dissipative flooring) and take the readings 5 seconds after the application of voltage or once the reading has reached equilibrium. The resistance in ohms is read on a properly calibrated Megohmmeter ("megger").
- (2) Point-to-groundable point resistance — An electrode with a 2.5 inch diameter and a weighing 5 lbs is connected to a Megohmmeter and placed on the surface being tested. The other megger lead is connected directly to a groundable point on the surface being tested.
- (3) Surface resistance — Two parallel metal electrodes of equal length and cross section are placed on the surface being tested. The distance between the electrodes should be the same as the length of the electrodes. Resistance is read on a Megohmmeter connected to the two electrodes and is expressed in ohms/square.

For quality control and lab procedures, the surface-to-surface test is most convenient. The measurements of point-to-groundable point test on smaller lab samples usually vary considerably from readings on a practical large floor. Based on these test results a facility manager can check if the flooring conforms to the specification when initially installed and track continual performance of the floor periodically.

NFPA 99 requires 5 measurements in each room and the average of the five readings is used as to determine the resistance level. ANSI/ESD standards also require 5 measurements per room and a minimum of 5 tests per 5,000 square feet for larger areas. At least 3 of the 5 readings must be conducted in areas of wear due to traffic, chemical or water exposure. The ANSI/ESD and NFPA standards require testing records to include date, temperature, humidity, testing voltage, duration of the test and the equipment used.

Maintenance of Resinous Static Control Floors

Providing floors with good maintenance is always the best solution to lasting service life for any type of floor. The standard of NFPA 99 describes appropriate maintenance for a conductive floor is very important to maintaining conductive property through its service life. There are four maintenance guidelines addressed, which are suitable for static dissipative floors.

- i) The surface of conductive or dissipative floors shall not be insulated by a film of oil or wax. Any waxes, polishes, or dressings used for maintenance of conductive floors shall not adversely affect the conductivity of the floor.
- ii) Floors that depend upon applications of water, salt solutions, or other treatment of a nonpermanent nature for their conductivity are not acceptable.
- iii) Cleaning instructions for conductive and dissipative floors shall be established, such as a daily basis cleaning, non-abrasive brush or pads being used and requirements for cleaners, then carefully followed to assure that conductivity characteristics of the floor are not adversely affected by such treatment.
- iv) The floor's resistance shall be periodically tested to ensure it still falls the range as initially specified.

Grounding Static Control Flooring

All static control flooring systems must be connected through an equipotential couple to a permanent earth ground. It is absolutely critical that a true earth\ ground be established and that a reference ground not be used. The ground couple is established over the primer layer with a conductive strip, mesh, wire or tape in accordance with EOS/ESD S6. "Standard for Protection of Electrostatic Discharge susceptible Items—Grounding—Recommended Practice". Contact the Technical Service Department for additional information.

Disclaimer

The information and recommendations set forth in this document are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product(s) offered at the time of publication. Published technical data and instructions are subject to change without notice.

Consult www.generalpolymers.com to obtain the most recent Product Data information and Application instructions.

Warranty

The Sherwin-Williams Company warrants our products to be free of manufacturing defects in accord with applicable Sherwin-Williams quality control procedures. Liability for products proven defective, if any, is limited to replacement of the defective product or the refund of the purchase price paid for the defective product as determined by Sherwin-Williams, NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY SHERWIN-WILLIAMS, EXPRESSED OR IMPLIED, STATUTORY, BY OPERATION OF LAW OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.



To learn more, visit us at

www.sherwin-williams.com/protective

or call 1-800-524-5979

to have a representative contact you.

©2013 The Sherwin-Williams Company
Protective & Marine Coatings 10/13